

STANDARD NOTCHES DEMENSION FOR TEMPERED GLASS


The height (Y1) of a notch must not more than its width (X1 and X2), ($X1 \geq Y1$, $X2 \geq Y1$).

The distance (b) between two notches must be at least half the width of the largest notch (X1), ($b \geq X1/2$).

The distance (a) between the notch and the edge of the glass must be at least half the width of the notch ($a \geq X1/2$).

The radius (R) of the notch must be more than or equal to the glass thickness.


The width (X and Y) of the notch must no more than 1/3 the width (W)/height (H) of the sheet of glass ($X \leq W/3$, $Y \leq H/3$).

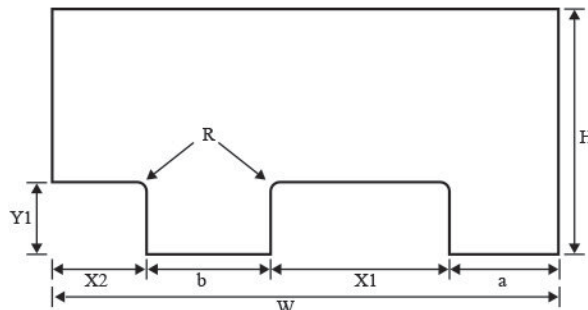

* Guidance given above is indicative and final manufacturing specification should be sought from the supplying factory.

Maximum Frameless Glass Door Dimension For CKS Floor Hinge (CKS-840)

	15Nm	20Nm	25Nm	28Nm
Max door width (W) mm	800	1000	1200	1300
Max door weight (kg)	75	100	115	130

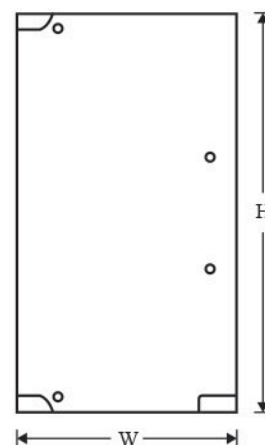


*** Remark:**

Please consult product manufacturer for maximum height (H) of frameless glass door.

Maximum Frameless Glass Door Dimension For CKS Shower Hinge (CKS-301, CKS-302, CKS-303 And CKS-304)

	For 10mm Glass Thickness With 2pcs hinges (A)	For 10mm Glass Thickness With 3pcs hinges (B)
Max width (W) mm	750	900
Max Height (H) mm	2400	3000
Max Weight (kg)	45	67.5

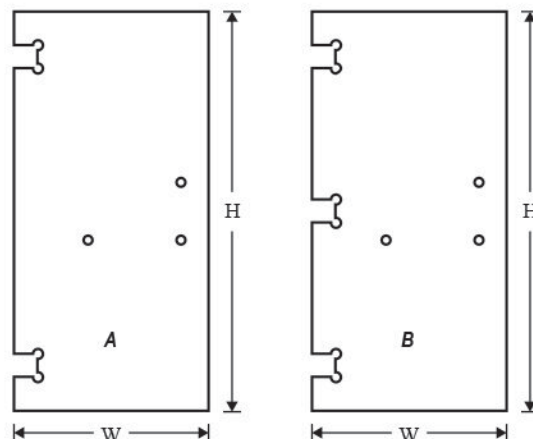

*** Remark:**

For 12mm glass thickness frameless glass door compulsively use 3pcs hinges with maximum glass door weight (w) 67.5kg only.

* Dimensions indicated above are for reference or guide only. Individual project requirement might differ and to check with CKS sales personnel for final glass specification and thickness.