

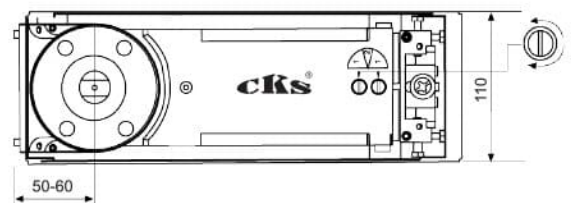


• **CKS-840**  
(15nm, 20nm, 25nm, 28nm)

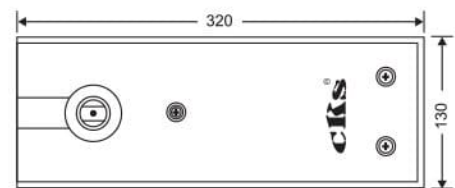

1. Fully controlled closing action with speed adjustment for the ranges 116° to 20° to 0° (either direction)
2. Hold open at 90°
3. Non-hold open (optional)



**Data & Features**

Spring strength		1	2	3	4
Closing force approx	(Nm.)	15	20	25	28
Max. door width		800	1000	1200	1300
Closing speed variable by valve adjustment		●	●	●	●
Max. door weight	(kg)	75	100	115	130
Hold-open point	90°	●	●	●	●
or non-hold open		○	●	●	○
Product weight approx.	(kg)	6.0	6.0	6.0	6.0
dimensions (mm)	Length	320			
	Width	130			
	Height	42			

● Yes ○ Option

Floor hinge adjustment in cement case: Length 10mm, Width 5mm, Height 5mm

\* Please refer the glass technical information section at the page no.112 to 115.

\* Subject to terms & conditions